




# INSTRUMENTATION MANIFOLDS

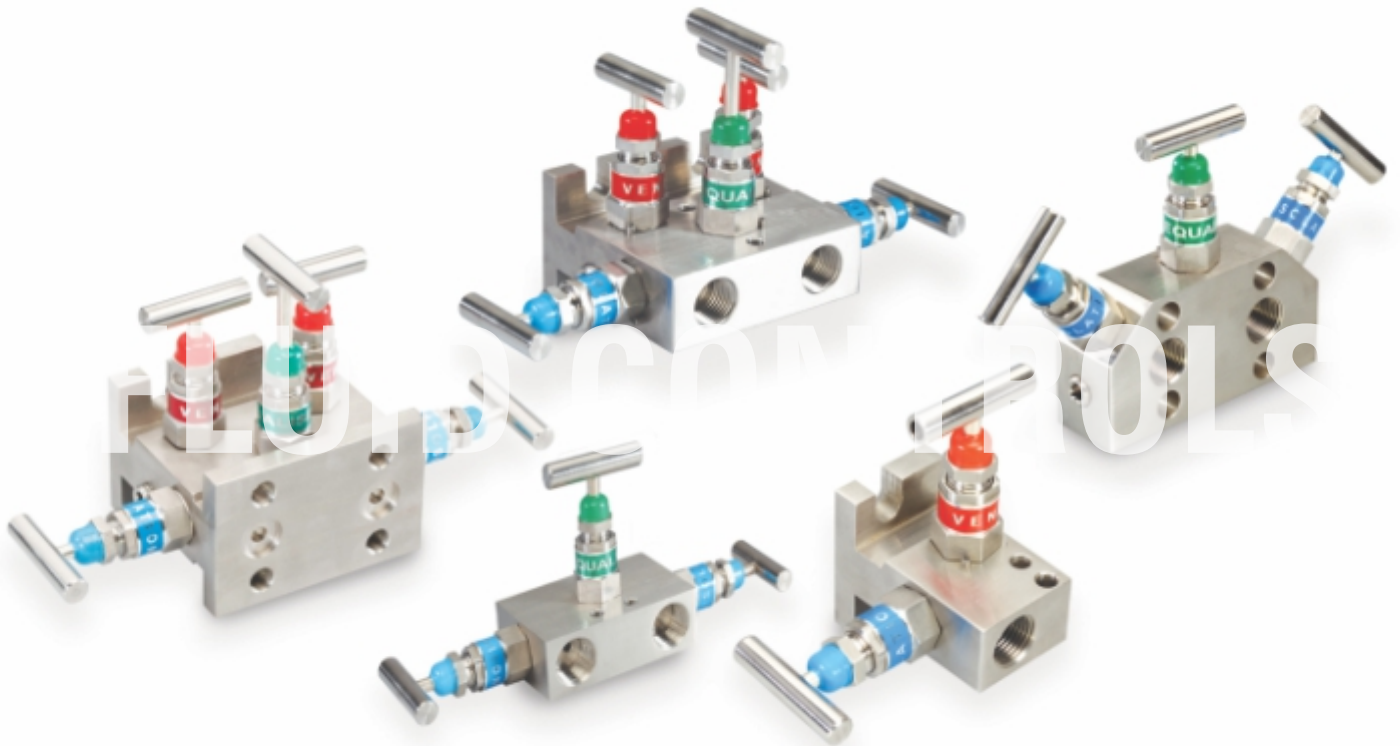

# INTRODUCTION

Established in 1974, Fluid Controls® Private Limited is an ISO 9001:2015, ISO 14001 and OHSAS 18001 certified company. Fluid Controls® is involved in the manufacturing of Valves, Manifolds, Double Ferrule Compression Tube Fittings and specialized accessories for use in instrumentation, hydraulics, pneumatics, and lubrication. The company has a wide range of products for the Oil and Gas Applications, Petrochemicals, Rotating Machinery, Power Generation, Cryogenic / Vacuum Applications and Railways.

The Valves Unit of Fluid Controls® Private Limited was founded in 1979 by Late Dr. Y. E. Moochhala, a Ph.D. in Mechanical Engineering from Northwestern University, USA. The unit was earlier known as Hyd-Air Engineering Works Lonavala and subsequently merged with Fluid Controls® Private Limited in 2013.

At Fluid Controls®, we draw our strength from our experience of 50 years in the design, engineering, manufacturing and supply of a range of high performance valves and manifolds. These precision products are used for instrumentation in the chemical, petrochemical and oil & gas industries, as well as for high pressure hydraulics, pneumatics and lubrication.

Fluid Controls® offers a series of Manifolds for compact piping and control in lines involving pressure and differential pressure instruments. Manifolds eliminate several parts used in the conventional method of piping (with individual valves and adaptors) resulting in cost saving. Their compact design reduces space requirements for operation and installation. The internal porting arrangement within the Manifold eliminates leakage points.

Fluid Controls® Manifolds are available in 2, 3 or 5 Valve construction.

Two Valve Manifolds are used in pressure instrument such as pressure gauges, pressure transmitters, pressure switches, etc.

Three Valve and Five Valve Manifolds are used in differential pressure instruments such as differential pressure transmitters, differential pressure switches, differential pressure gauges etc.

Three Valve Manifolds are the most commonly used manifolds. They may be provided with test ports on the process side and drain ports on the instrument side for drawing of the process and instrument lines respectively.

Five Valve Manifolds are normally used with differential pressure instruments where drain valves are required on the instrument side. They are also useful for flushing of the system and prevention of loss of expensive Fluid Controls in the impulses.


Fluid Controls® Manifolds are available in four designs:

SEPARATELY MOUNTED MANIFOLDS meant for installation from the instrument and are usually connected by means of pipes or tubes, pipes and pipe fittings/tubes and tube fittings.

DIRECT MOUNTING 'T' TYPE MANIFOLDS for the direct mounting on the instrument and screwed process connections.

DIRECT MOUNTING "H" TYPE Manifold for stacked assembly between the instrument and flanged process connection.

CO-PLANAR MANIFOLDS mount directly on to the instrument eliminating the adapter plate.

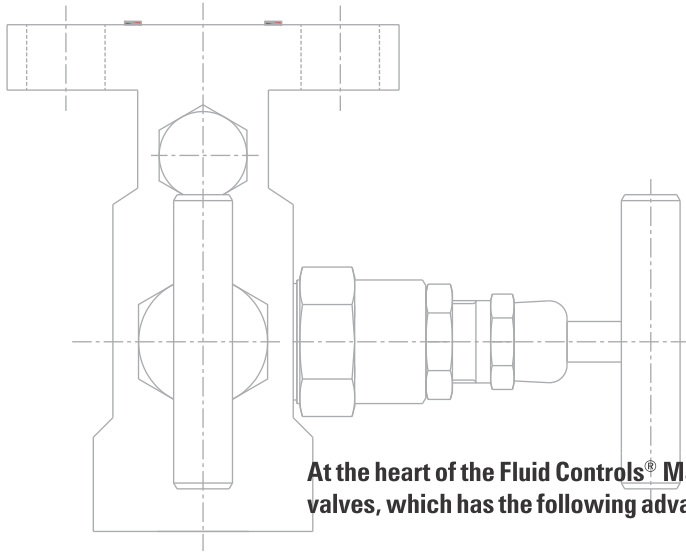

**At the heart of the Fluid Controls® Manifold is the design of the pressure sealing system for each of the valves, which has the following advantages:**

- The stem threads are rolled to reduce friction
- Stem threads are coated with a silver teflon mixture to allow for smooth operation.
- The stem plug has swiveling design and is uniquely hardened to provide for wear and long life.
- The pipe sealing system prevents blowout of the stem and reduces gland leakage.

**Fluid Controls® Manifolds are available in variety of materials depending on the usage. The most common materials of construction are**

- Carbon Steel ASTM A 105
- Stainless Steel ASTM A 479/A182 F 304, F316, F304L and F316L, F321
- Cupro-Nickel: Monel
- Inconel
- Hastelloy
- Titanium

The choice of the materials is based on the working and the installation location where atmospheric conditions may vary and require materials to prevent corrosion and withstand vibration.

Manifolds in Stainless Steel and Monel are also available with conformity to NACE MR 01 75 for corrosion resistance.

**Fluid Controls® Manifolds are available in three specific designs.**

- The standard design is with a case hardened swiveling stem plug suitable for most applications in low, medium and high pressure range.
- Where gas at high pressure is encountered, a swiveling plug with soft seat is preferred. The standard seat materials are reinforced PTFE, Delrin and PEEK.
- The thread design is for a case hardened ball plug in 316 Stainless Steel. Alternatively, Hastelloy, Monel, Inconel and Titanium manifolds have Tungsten Carbide ball plugs.
- All these designs are available in a standard thread above the seal design so that stem threads are not wetted by the fluid flowing in the system.


The gland sealing arrangements used in Fluid Controls® Manifolds vary with the temperature requirement. The most common material is RPTFE for temperatures up to 180°C. For temperatures in the range 180°C to 270°C graphitized asbestos is a common gland seal material. Beyond 270°C and up to 540°C, graphoil is the standard use.

**ORDERING CODE FOR 2 VALVE MANIFOLD**

DESCRIPTION	FEATURE	SYMBOL	8	-	2	MNV-PTM-	4	D	N	SFT-GOIL.SS	
Threaded Process - Instrument Connections	1/4"	4	8	-	2	MNV-PTM-	4	D	N	SFT-GOIL.SS	
	1/2"	8									
	3/4"	12									
Valves contained	No of cartridges	2									
Series	With all threaded connection	2 MNV									
	With flanged instrument & threaded process connection	2 FMNV									
	Coplanar	2 CPL									
Type	<b>Line mounting type</b>										
	Straight	I									
	Angle	II									
	<b>Surface mounting type with</b>										
	(1) Vent valve on top & isolation valve on side	PTM 1									
	(2) Isolation & vent valve on opposed & drain on process side	PTM 2									
	(3) Isolation & vent valve on opposed-drain on top	PTM 3									
	(4) All valves on one side vent valve angled	PTM 4									
	(5) Both valves on top drain on process side	PTM 5									
	(6) Vent valve on side isolation valve on top angled-drain in front	PTM 6									
<b>Flange mounting type</b>											
(7) Screwed inlet & flanged outlet, isolation valve on top angled & vent on side	PTM7										
(8) Single isolate/vent block, direct mounting type	DM 1										
(9) On ASA-RF flange	FL 1										
Thread size of Drain Connection	For 1/4" NPT	4	8	-	2	MNV-PTM-	4	D	N	SFT-GOIL.SS	
	For 1/2" NPT	8									
	For 3/4" NPT	12									
No symbol is required if instrument process & drain thread size are same											
Drain plug	Not required	No symbol									
	Required	D									
Thread Specification	NPT to ASA B 2.1 - 1960	N									
	ISO parallel to ISO : 228/1	R									
	ISO taper to ISO : 7/1	RX									
Seat	Metallic seat	No symbol									
	Soft seat for isolation valves only										
	Soft seat material _ PTFE	SFT									
	DELIN	SFD									
	PEEK	SFP									
Stem packing Material	Teflon (standard)	No symbol									
	Graphitized asbestos	GASB									
	Graphoil	GOIL									
	Teflon asbestos	TASI									
Body material	A 105	No symbol									
	SS 304/SS 304L **	S/SL									
	SS 316/SS 316L **	SS/SSL									
	Monel	MNL									
	Hastelloy C	HAC									

\*\* For material conformity to NACE MR-01-75 USE SUFFIX "NACE" AS S/NACE , SS/NACE,SSL/NACE


Note : Due to continuous improvement & customer interaction designs & specifications may be modified or upgraded without notice.

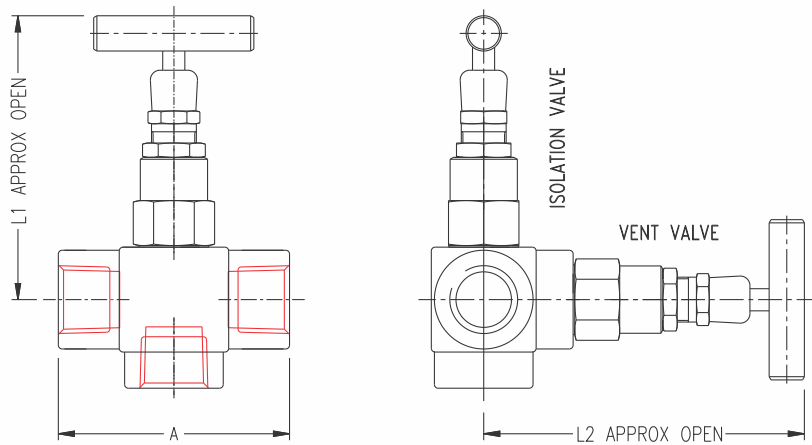

### DESCRIPTION

Two valve manifold is designed in a single block with female screwed inlet and outlet port combining isolation valve and calibration / vent valve. Generally used on static pressure transmitters, switches or gauges.


PROCESS PORT	GAUGE PORT	DRAIN PORT	A	L1	L2
1/2" NPT(F)	1/2" NPT(F)	1/4" NPT(F)	70	98	110
1/2" NPT(F)	1/2" NPT(F)	1/2" NPT(F)	70	98	110
3/4" NPT(F)	3/4" NPT(F)	3/4" NPT(F)	70	98	110
1/2" BSP(F)	1/2" BSP(F)	1/2" BSP(F)	70	98	110
1/2" NBSW	1/2" NPT(F)	1/2" NPT(F)	70	98	110
3/4" NBSW	1/2" NPT(F)	1/2" NPT(F)	70	98	110



### ANGLE TYPE II

GAUGE INLINE WITH DRAIN / VENT AND PROCESS AT RIGHT ANGLE

1/2" BSP(F)	1/2" NPT(F)	1/2" NPT(F)	70	98	110
3/4" NPT(F)	3/4" NPT(F)	3/4" NPT(F)	70	98	110
1/2" NBSW	1/2" NPT(F)	1/2" NPT(F)	70	98	110
3/4" NBSW	1/2" NPT(F)	1/2" NPT(F)	70	98	110



Test Pressure : @ 25°C Room Temperature

Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
 Seat - 413 Kg/cm<sup>2</sup>  
 Pneumatic : Seat - 40 Kg/cm<sup>2</sup>


Gland packing : PTFE : Standard  
 : GRAPHOIL : Temperatures above 180°C

Material : A 105, A 182 Gr F 304SS, A 182 Gr F 316SS, Monel, Hastelloy

Finish : CS : Zinc Plated and Dichromated; SS : Natural

Option : Drain plug. Three piece union for gauge positioning

OPTIONAL ITEM




THREE PIECE UNION FOR GAUGE POSITIONING

## TWO VALVE (THREE-WAY) MANIFOLD FOR PRESSURE INSTRUMENTS



Model No. 2 MNV

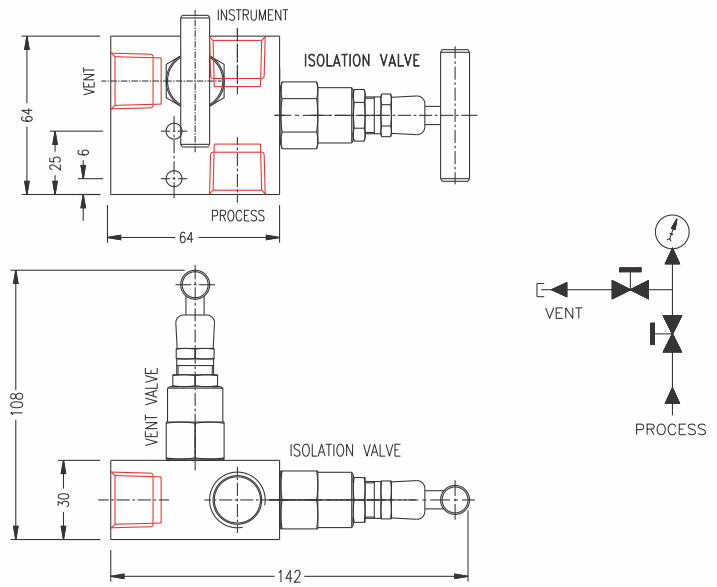

## DESCRIPTION

Two valve manifold is designed in a single block with female screwed inlet and outlet port combining isolation valve and calibration / vent valve. Generally used on static pressure transmitters, switches or gauges.

Connections : Process : 1/2" NPT (F)  
 Instrument : 1/2" NPT (F)  
 Drain / Vent : 1/4" NPT (F), 1/2" NPT (F)

Test Pressure : @ 25°C Room Temperature  
 Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
 Seat - 413 Kg/cm<sup>2</sup>  
 Pneumatic : Seat - 40 Kg/cm<sup>2</sup>

Gland packing : PTFE : Standard  
 : GRAPHOIL : Temperatures above 180°C

Material : A 105, A 182 / A 479 Gr F 304SS, A 182 / A 479 Gr F316SS, Monel, Hastelloy


Finish : CS : Zinc Plated and Dichromated; SS : Natural

Option : Drain Plug. Three piece union for gauge positioning


Accessory : Mounting Bolts - IS : 1364 - 1960 - 2 Nos

## TWO VALVE MANIFOLD-PTM 1

VENT VALVE ON TOP AND ISOLATION VALVE ON SIDE

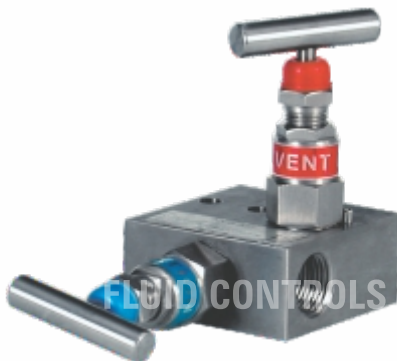

Model No. 2 PTM 1

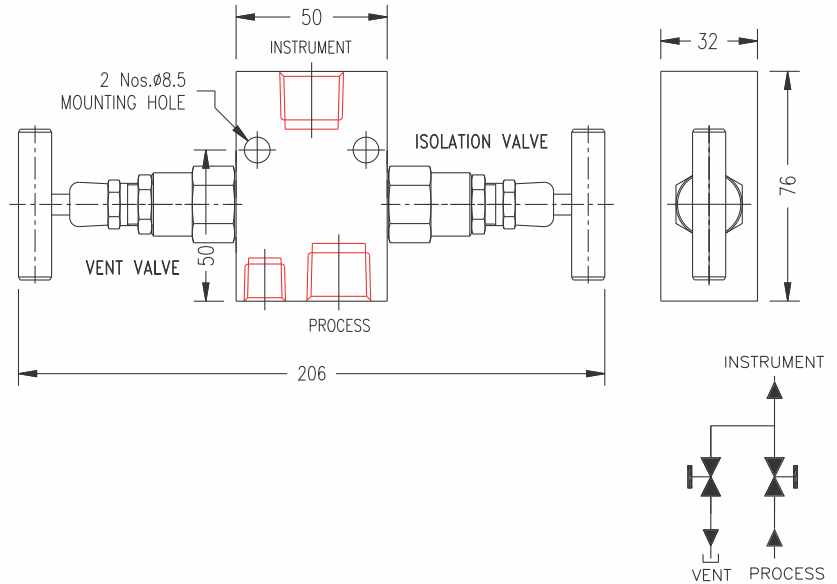

## TWO VALVE MANIFOLD-PTM 2

ISOLATION & VENT VALVE  
OPPOSED AND DRAIN  
ON PROCESS SIDE



Model No. 2 PTM 2

### DESCRIPTION

Two valve manifold is designed in a single block with female screwed inlet and outlet port combining isolation valve and vent / calibration valve . Generally used on static pressure transmitters , switches or gauges.

Connections : Process : 1/2"NPT (F)  
Instrument : 1/2"NPT (F)  
Drain / Vent : 1/4" NPT (F)

Test Pressure : @ 25° C Room Temperature  
Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
Seat - 413 Kg/cm<sup>2</sup>  
Pneumatic : Seat - 40 Kg/cm<sup>2</sup>


Gland packing : PTFE : Standard  
: GRAPHOIL : Temperatures above 180°C

Material : A 105, A 182 / A 479 Gr F 304SS, A 182 / A 479 Gr F316SS,  
Monel, Hastelloy

Finish : CS : Zinc Plated and Dichromated; SS : Natural

Option : Drain Plug. Three piece union for gauge positioning

Accessory : Mounting Bolts - IS : 1364 - 1960

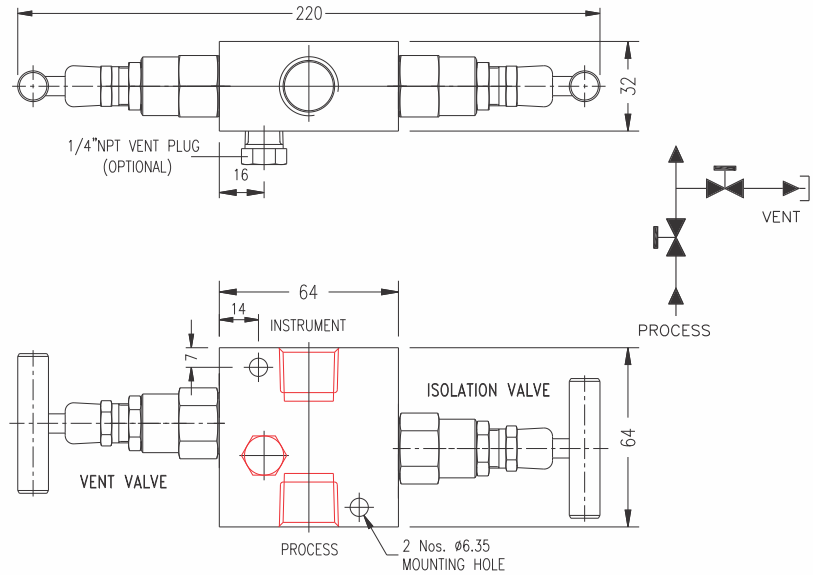

## DESCRIPTION

Two valve manifold is designed in a single block with female screwed inlet and outlet port combining isolation valve and vent / calibration valve . Generally used on static pressure transmitters , switches or gauges.

Connections : Process : 1/2" NPT (F)  
 Instrument : 1/2" NPT (F)  
 Drain / Vent : 1/4" NPT (F)

Test Pressure : @ 25° C Room Temperature  
 Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
                   Seat - 413 Kg/cm<sup>2</sup>  
 Pneumatic : Seat - 40 Kg/cm<sup>2</sup>

Gland packing : PTFE : Standard  
                   : GRAPHOIL : Temperatures above 180°C

Material : A 105, A 182 / A 479 Gr F 304SS, A 182 / A 479 Gr F316SS,  
 Monel, Hastelloy

Finish : CS : Zinc Plated and Dichromated; SS : Natural

Option : Drain Plug. Three piece union for gauge positioning

Accessory : Mounting Bolts - IS : 1364 - 1960 - 2 Nos


## TWO VALVE MANIFOLD-PTM 3

ISOLATION & VENT  
 VALVE OPPOSED  
 AND DRAIN ON TOP



Model No. 2 PTM 3



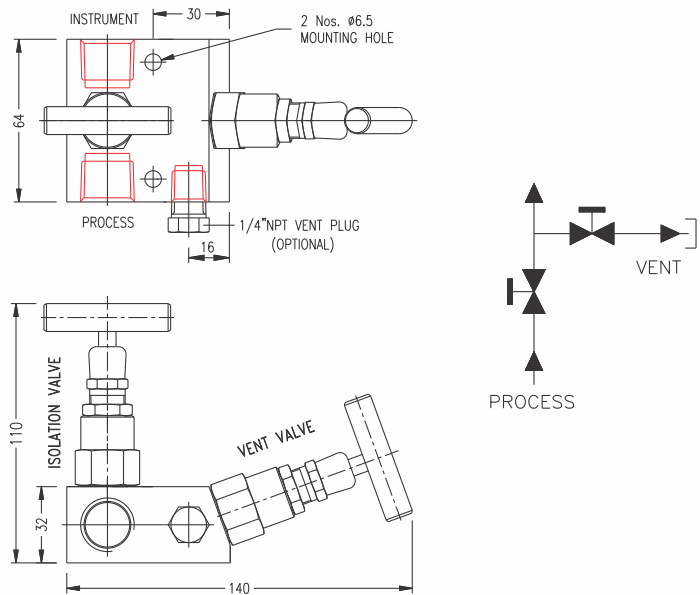

## TWO VALVE MANIFOLD - PTM 4

ALL VALVES ON  
ONE SIDE - VENT  
VALVE ANGLED



Model No. 2 PTM 4

### DESCRIPTION

Two valve manifold is designed in a single block with female screwed inlet and outlet port combining isolation valve and vent / calibration valve . Generally used on static pressure transmitters , switches or gauges.

Connections : Process : 1/2" NPT (F), 1/4" NPT (F)  
Instrument : 1/2" NPT (F), 1/4" MPT (F)  
Drain / Vent : 1/4" NPT (F)

Test Pressure : @ 25° C Room Temperature  
Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
Seat - 413 Kg/cm<sup>2</sup>  
Pneumatic : Seat - 40 Kg/cm<sup>2</sup>


Gland packing : PTFE : Standard  
: GRAPHOIL : Temperatures above 180°C

Material : A 105, A 182 / A 479 Gr F 304SS, A 182 / A 479 Gr F316SS,  
Monel, Hastelloy

Finish : CS : Zinc Plated and Dichromated; SS : Natural

Option : Drain Plug. Three piece union for gauge positioning

Accessory : Mounting Bolts - IS : 1364 - 1960 - 2 Nos

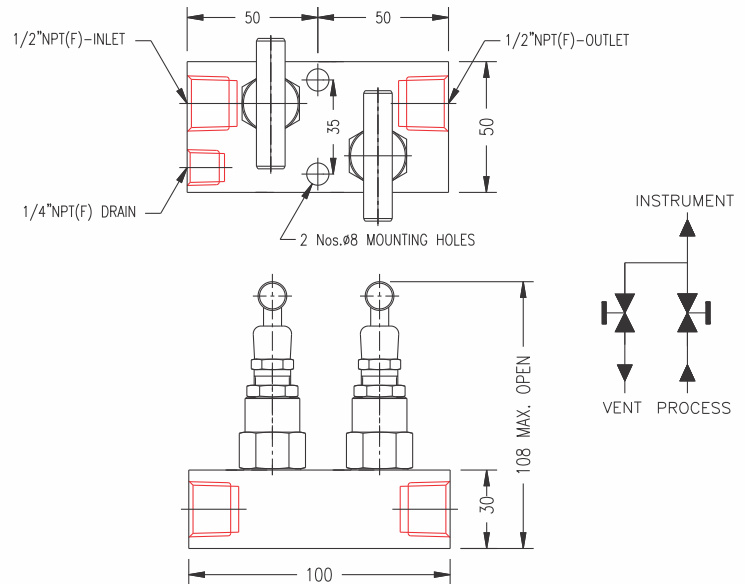

## DESCRIPTION

Two valve manifold is designed in a single block with female screwed inlet and outlet port combining isolation valve and vent / calibration valve . Generally used on static pressure transmitters , switches or gauges.

Connections : Process : 1/2" NPT (F)  
 Instrument : 1/2" NPT (F)  
 Drain / Vent : 1/4" NPT (F)

Test Pressure : @ 25° C Room Temperature  
 Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
                   Seat - 413 Kg/cm<sup>2</sup>  
 Pneumatic : Seat - 40 Kg/cm<sup>2</sup>

Gland packing : PTFE : Standard  
                   : GRAPHOIL : Temperatures above 180°C

Material : A 105, A 182 / A 479 Gr F 304SS, A 182 / A 479 Gr F316SS,  
 Monel, Hastelloy


Finish : CS : Zinc Plated and Dichromated; SS : Natural

Option : Drain Plug. Three piece union for gauge positioning


Accessory : Mounting Bolts - IS : 1364 - 1960 - 2 Nos

## TWO VALVE MANIFOLD-PTM 5

BOTH VALVES ON TOP -  
DRAIN ON PROCESS SIDE



Model No. 2 PTM 5

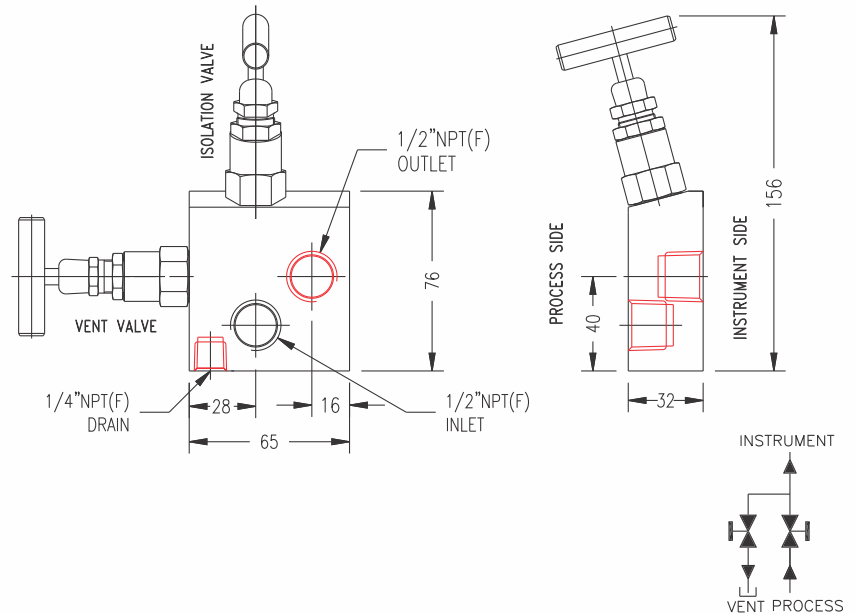

## DESCRIPTION

Two valve manifold is designed in a single block with female screwed inlet and outlet port combining isolation valve and vent / calibration valve . Generally used on static pressure transmitters , switches or gauges.

Connections : Process : 1/2" NPT (F)  
 Instrument : 1/2" NPT (F)  
 Drain / Vent : 1/4" NPT (F)

Test Pressure : @ 25° C Room Temperature  
 Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
                   Seat - 413 Kg/cm<sup>2</sup>  
 Pneumatic : Seat - 40 Kg/cm<sup>2</sup>

Gland packing : PTFE : Standard  
 : GRAPHOIL : Temperatures above 180°C

Material : A 105, A 182 / A 479 Gr F 304SS, A 182 / A 479 Gr F316SS,  
 Monel, Hastelloy

Finish : CS : Zinc Plated and Dichromated; SS : Natural

Option : Drain Plug


Accessory : Mounting Bolts - IS : 1364 - 1960 - 2 Nos

## TWO VALVE MANIFOLD-PTM 6

VENT VALVE ON SIDE,  
 ISOLATION VALVE TOP ANGLED -  
 DRAIN IN FRONT



Model No. 2 PTM 6

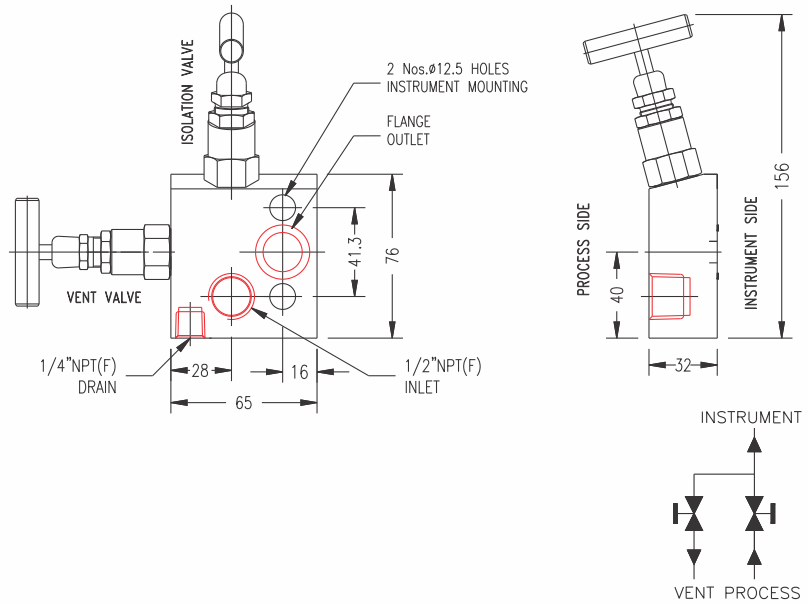

## DESCRIPTION

Two valve manifold is designed in a single block with female screwed inlet and outlet port combining isolation valve and vent / calibration valve . Generally used on static pressure transmitters , switches or gauges.

Connections : Process : 1/2" NPT (F)  
 Instrument : Flanged  
 Drain / Vent : Standard - 1/4" NPT (F)  
 Optional - 1/2" NPT (F)

Test Pressure : @ 25° C Room Temperature  
 Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
 Seat - 413 Kg/cm<sup>2</sup>  
 Pneumatic : Seat - 40 Kg/cm<sup>2</sup>

Gland packing : PTFE : Standard  
 : GRAPHOIL : Temperatures above 180°C

Material : A 105, A 182 / A 479 Gr F 304SS, A 182 / A 479 Gr F316SS,  
 Monel, Hastelloy

Finish : CS : Zinc Plated and Dichromated; SS : Natural

Option : Drain Plug


Accessory : Mounting Bolts - IS : 1364 - 1960 - 2 Nos  
 Interface seal - PTFE / VITON - 1 Nos

## TWO VALVE DIRECT MOUNTING MANIFOLD

VENT VALVE ON SIDE  
 ISOLATION VALVE TOP ANGLED  
 DRAIN IN FRONT



Model No. 2 PTM 7

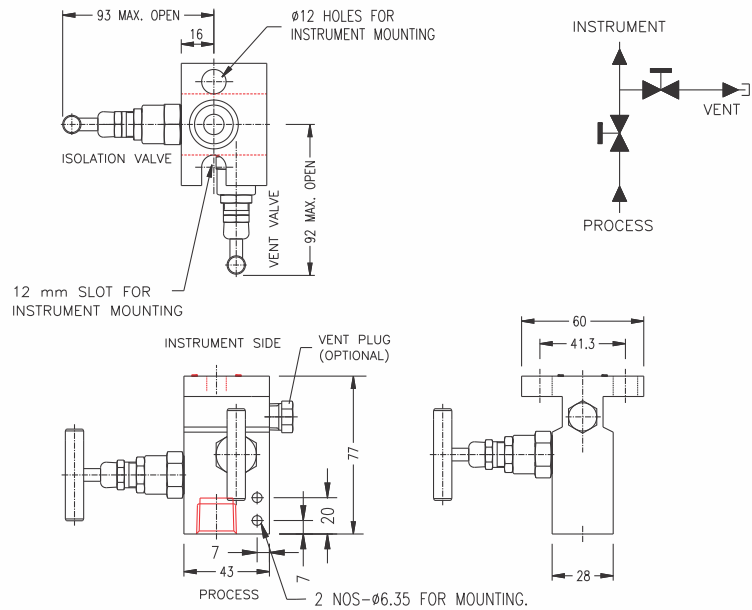

## DESCRIPTION

Two valve manifold is designed in a single block with female screwed inlet and outlet port combining isolation valve and vent / calibration valve . Generally used on static pressure transmitters , switches or gauges.

Connections : Process : 1/2" NPT (F)  
 Instrument : Flanged  
 Drain / Vent : 1/4" NPT (F)

Test Pressure : @ 25° C Room Temperature  
 Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
 Seat - 413 Kg/cm<sup>2</sup>  
 Pneumatic : Seat - 40 Kg/cm<sup>2</sup>

Gland packing : PTFE : Standard  
 : GRAPHOIL : Temperatures above 180°C


Material : A 105, A 182 Gr F 304SS, A 182 Gr F 316SS, Monel, Hastelloy

Finish : CS : Zinc Plated and Dichromated; SS : Natural

Option : Drain Plug


Accessory : Mounting Bolts - IS : 1364 - 1960 - 2 Nos  
 Interface seal - PTFE / VITON - 1 Nos

## TWO VALVE "T" TYPE MANIFOLD FOR PRESSURE INSTRUMENTS

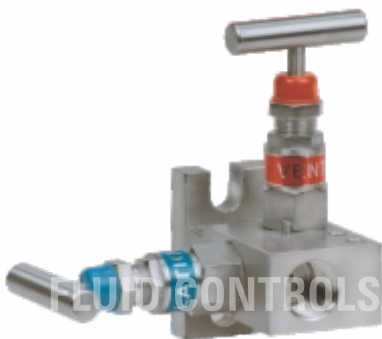

Model No. 2 TM 1

## TWO VALVE MANIFOLD SINGLE ISOLATE / VENT BLOCK DIRECT MOUNTING TYPE

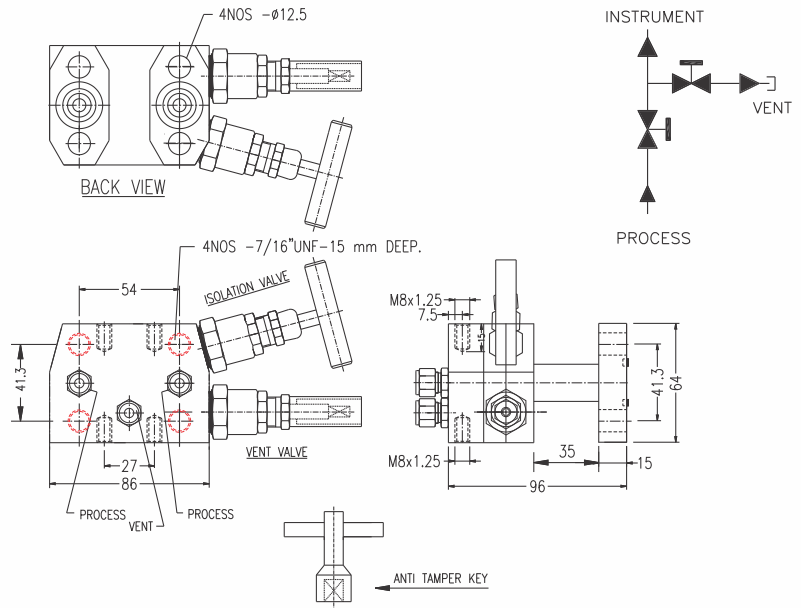

### DESCRIPTION

Designed for low pressure application and level measurement on atmospheric tanks with differential pressure transmitters.

Isolate valve with T-bar handle  
Vent valve with anti tamper handle.

Connections : Process : 1/4" NPT (F) / 1/4" BSPT (F) / 10 mm OD  
Instrument : Flanged  
Drain / Vent : 1/4" NPT (F) / 1/4" BSPT (F) / 10 mm OD

Test Pressure : @ 25°C Room Temperature  
Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
Seat - 413 Kg/cm<sup>2</sup>  
Pneumatic : Seat - 40 Kg/cm<sup>2</sup>

Gland packing : PTFE : Standard  
GRAPHOIL : Temperatures above 180°C


Material : A 105, A 182 Gr F 304SS, A 182 Gr F 316SS, Monel, Hastelloy

Finish : CS : Zinc Plated and Dichromated; SS : Natural

Accessory : Mounting Bolts - IS : 1364 - 1960 - 4 Nos  
Interface seal - PTFE / VITON - 2 Nos



Model No. 2 DM 1

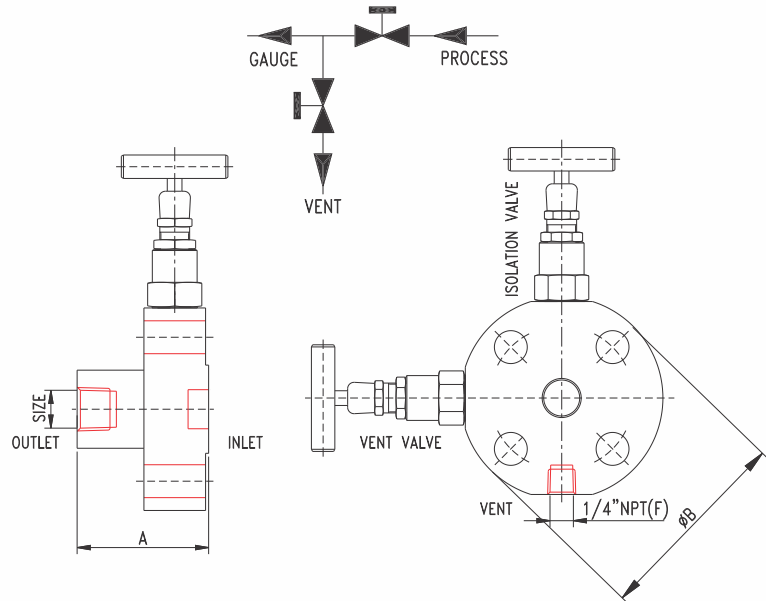

### DESCRIPTION

Designed for one-piece block and bleed assemblies for primary isolation of pressure take-offs, where the valve is directly mounted to the vessel or process pipe. Instruments may be directly mounted to the valve outlet or alternatively remotely mounted with gauge lines/impulse pipe work.

- Test Pressure : @ 25°C Room Temperature  
 Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
                   Seat - 413 Kg/cm<sup>2</sup>  
 Pneumatic : Seat - 60 Kg/cm<sup>2</sup>
- Gland packing : PTFE : Standard  
                   : GRAPHOIL : Temperatures above 180°C

- Material : A 105, A 182 Gr F 304SS, A 182 Gr F 316SS, Monel, Hastelloy  
 Finish : CS : Zinc Plated and Dichromated; SS : Natural  
 Accessory : Mounting Bolts - IS : 1364 - 1960 - 4 Nos

## TWO VALVE MANIFOLD BLOCK AND BLEED ON ASA - RF FLANGE




Size Inches	Rating lb	A-RF	B
1/2"	150	57	89
1/2"	300	57	96
1/2"	600	61	96
1/2"	900/1500	64	121
1/2"	2500	64	134
3/4"	150	57	99
3/4"	300	60	118
3/4"	600	64	118
3/4"	900/1500	64	130
3/4"	2500	64	140
1"	150	57	108
1"	300	60	124
1"	600	64	124
1"	900/1500	67	150
1"	2500	67	159

Model No. 2 FL 1

## COPLANAR MOUNTING TWO VALVE MANIFOLD



Model No. 2 CPL

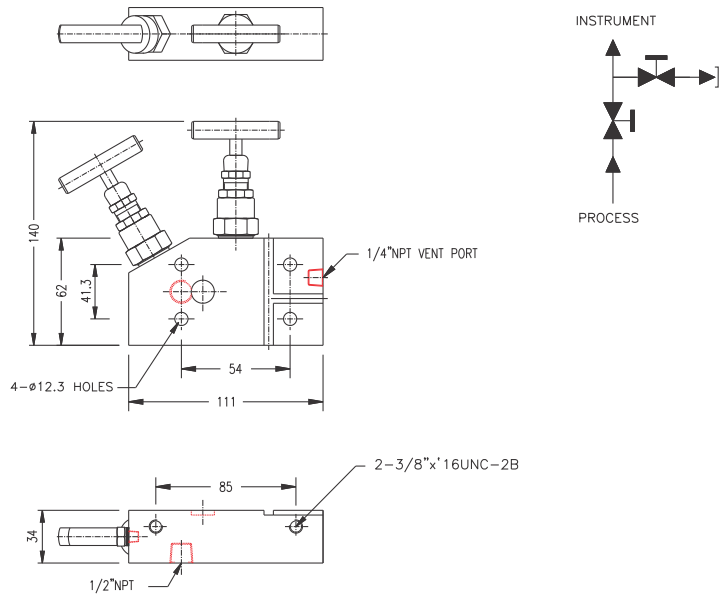

### DESCRIPTION

Designed as a new series of process instrument manifold for particular transmitter models. This integral manifold when assembled to transmitter has the advantage of compact size with ease for operation in minimum space, thereby eliminating several components in integrating the manifold to the transmitter. This manifold has one isolating valve and vent valve.

Connections : Process : 1/2" NPT (F)  
 Instrument : Flanged  
 Drain / Vent : 1/4" NPT (F)

Test Pressure : @ 25°C Room Temperature  
 Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
 Seat - 413 Kg/cm<sup>2</sup>  
 Pneumatic : Seat - 40 Kg/cm<sup>2</sup>

Gland packing : PTFE : Standard  
 : GRAPHOIL : Temperatures above 180°C

Material : A 105, A 182 / A 479 Gr F 304SS, A 182 / A 479 Gr F316SS,  
 Monel, Hastelloy

Finish : CS : Zinc Plated and Dichromated; SS : Natural

Optional : Drain plug

Accessory : Mounting Bolts - IS : 1364 - 1960 - 4 Nos



**ORDERING CODE FOR 3 VALVE MANIFOLD**


DESCRIPTION	FEATURE	SYMBOL	8	-	3	FMNV-DM1	-	D	N	SFT-TASI	SSL	
Threaded process-Instrument connections	1/4"	4										
	1/2"	8										
Valves contained	No of cartridges											
Series	(1) with all threaded connection	3 MNV										
	(2) Direct mounting 'T' type with flanged instrument & threaded process connections	3 FMNV										
	(3) With flanged process connection	3 FFMNV										
	(4) Coplanar	3 CPL										
Type	All threaded connections	Remote mounting type with isolation valve sides and equalizing valve on top										
	For flanged instrument and threaded process connections	Direct mounting 'T' type										No symbol
		Direct mounting block type with all valves on top										DM 1
		Direct mounting block type with only equalizing valve on top										DM 2
		Coplanar										No symbol
For flange to flange connections	Flanged instrument connection for direct mounting & flanged process for oval flange connection	No symbol										
Drain plug	Not required	No symbol										
	Required	D										
Thread specification	NPT to ASA B 2.1 - 1960	N										
	ISO parallel to ISO : 228/1	R										
	ISO taper to ISO : 7/1	RX										
Note : not applicable for manifolds with flange to flange end connections.												
Seat	Metallic seat	No symbol										
	Soft seat for isolation valves only											
	Soft seat material - PTFE	SFT										
	DELFIN	SFD										
	PEEK	SFP										
Stem packing material	Teflon (standard)	No symbol										
	Graphitised asbestos	GASB										
	Graphoil	GOIL										
	Teflon asbestos	TASI										
Body material	A 105	No symbol										
	SS 304/SS304L **	S/SL										
	SS 316 /SS316L**	SS/SSL										
	Monel	MNL										
	Hastelloy C	HAC										

\*\* for material conformity to NACE MR-01-75 USE SUFFIX "NACE" AS S/NACE, SS/NACE,SSL/NACE

**3 VALVE MANIFOLDS**

Note : Due to continous improvement & customer interaction designs & specifications may be modified or upgraded without notice.



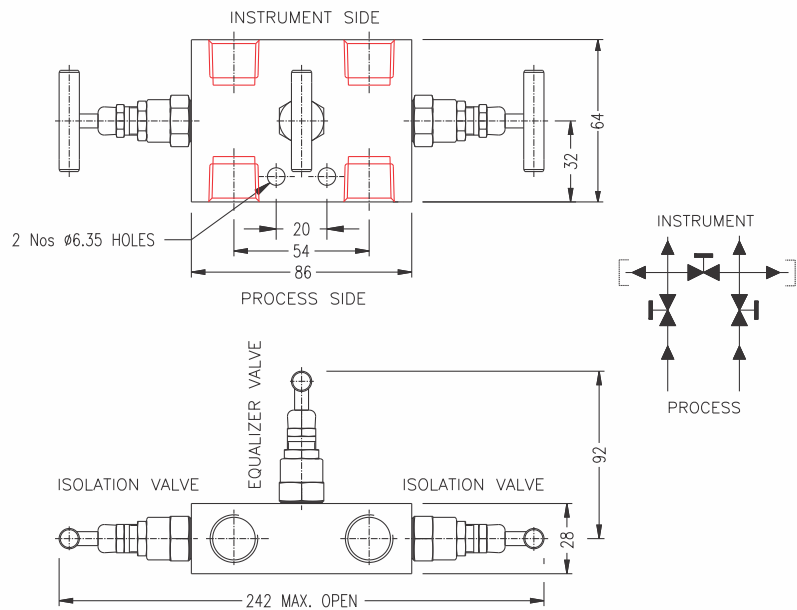

## DESCRIPTION

Designed for applications to facilitate remote mounting of differential pressure instruments. Dimensions shown above are for the standard 54 mm or 2 1/8 inch instrument connection. Centre distance found in majority of instruments. The manifold is also available for instruments with other centre distances for instrument connections (as 55 mm, 56 mm and 57 mm) but dimensions shown will vary. Please consult us for these dimensions. Useful for installations in remote fields eliminating conventional method of piping.

Connections : Process : 1/2" NPT (F)  
 Instrument : 1/2" NPT (F)  
 Drain / Vent : 1/4" NPT (F)

Test Pressure : @ 25°C Room Temperature  
 Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
                   Seat - 413 Kg/cm<sup>2</sup>  
 Pneumatic : Seat - 40 Kg/cm<sup>2</sup>

Gland packing : PTFE : Standard  
                   : GRAPHOIL : Temperatures above 180°C

Material : A 105, A 182 Gr F 304SS, A 182 Gr F 316SS, Monel, Hastelloy

Finish : CS : Zinc Plated and Dichromated; SS : Natural

Option : Drain Port on instrument side with drain plug (Dimension 64 becomes 82)  
 Test Port on process side with plug.

Accessory : Mounting Bolts - IS : 1364 - 1960 - 2 Nos

## THREE - VALVE MANIFOLD, REMOTE MOUNTING

VALVE ON THREE SIDES  
WITH SCREWED  
CONNECTIONS




Model No. 3 RM 1

## THREE VALVE MANIFOLD, DIRECT MOUNTING - TYPE DM 1

ALL VALVE ON TOP,  
SCREWED PROCESS CONNECTIONS



Model No. 3 DM 1

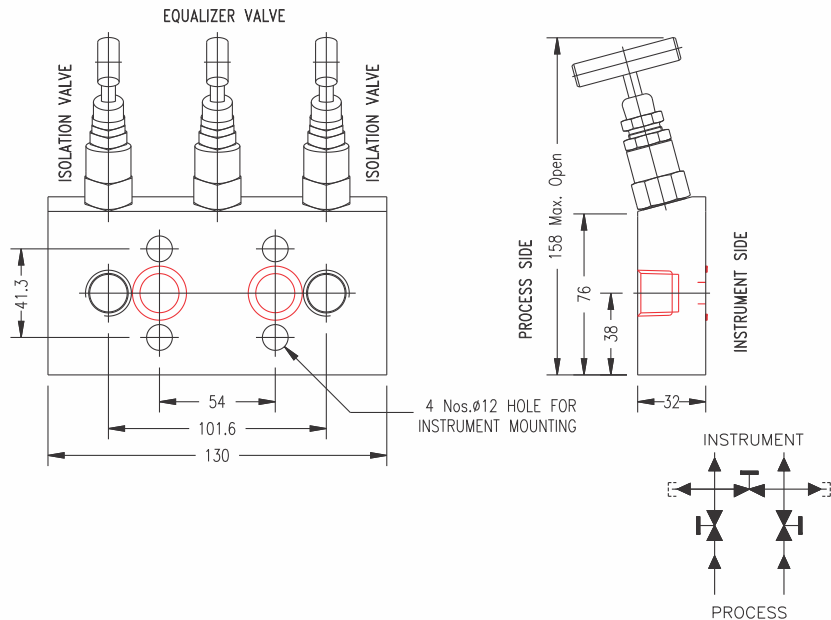

### DESCRIPTION

Designed for direct mounting on to standard differential pressure transmitters. This manifold block incorporates three valves, two main process isolation valves and one equalising valve.

This design is suitable where the straight valve may foul with the instrument and to provide ease of operation.

Dimensions shown above are for the standard 54 mm or 2 1/8 inch instrument connection Centre distance found in majority of instruments. The manifold is also available for instruments with other centre distances for instrument connections (as 55 mm, 56 mm and 57 mm) but dimensions shown will vary. Please consult us for these dimensions.

Connections : Process : 1/2" NPT (F)  
Instrument : Flanged  
Drain / Vent : 1/4" NPT (F)

Test Pressure : @ 25°C Room Temperature  
Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
Seat - 413 Kg/cm<sup>2</sup>  
Pneumatic : Seat - 40 Kg/cm<sup>2</sup>


Gland packing : PTFE : Standard  
: GRAPHOIL : Temperatures above 180°C

Material : A 105, A 182 / A 479 Gr F 304SS, A 182 / A 479 Gr F316SS,  
Monel, Hastelloy

Finish : CS : Zinc Plated and Dichromated; SS : Natural

Option : Drain Port on instrument side with drain plug.  
Test Port on process side with plug.

Accessory : Mounting Bolts - IS : 1364 - 1960 - 4 Nos  
Interface seal - PTFE / VITON - 2 Nos

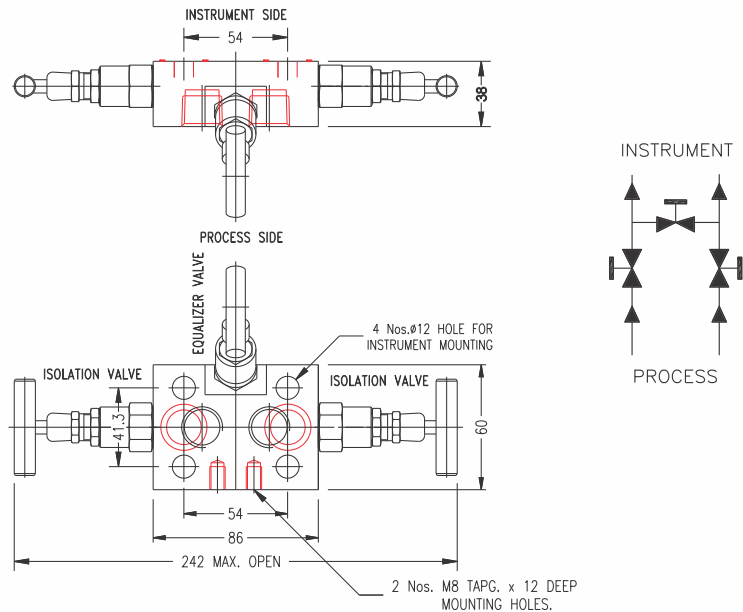

## DESCRIPTION

Designed for direct mounting on to standard differential pressure transmitters. This manifold block incorporates three valves, two main process isolation valves and one equalising valve.

This design is suitable where the straight valve may foul with the instrument and to provide ease of operation.

Dimensions shown above are for the standard 54 mm or 2 1/8 inch instrument connection Centre distance found in majority of instruments. The manifold is also available for instruments with other centre distances for instrument connections (as 55 mm, 56 mm and 57 mm) but dimensions shown will vary. Please consult us for these dimensions.

## THREE VALVE MANIFOLD, DIRECT MOUNTING TYPE DM 2

FLANGED BODY WITH VALVES  
ON THREE SIDES, SCREWED  
PROCESS CONNECTION



Model No. 3 DM 2

Connections : Process : 1/2" NPT (F)  
Instrument : Flanged

Test Pressure : @ 25° C Room Temperature  
Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
Seat - 413 Kg/cm<sup>2</sup>  
Pneumatic : Seat - 40 Kg/cm<sup>2</sup>


Gland packing : PTFE : Standard  
: GRAPHOIL : Temperatures above 180°C

Material : A 105, A 182 / A 479 Gr F 304SS, A 182 / A 479 Gr F316SS,  
Monel, Hastelloy

Finish : CS : Zinc Plated and Dichromated; SS : Natural

Optional : Drain Port on instrument side with drain plug.  
Test Port on process side with plug.

Accessory : Mounting Bolts - IS : 1364 - 1960 - 4 Nos  
Interface seal - PTFE / VITON - 2 Nos

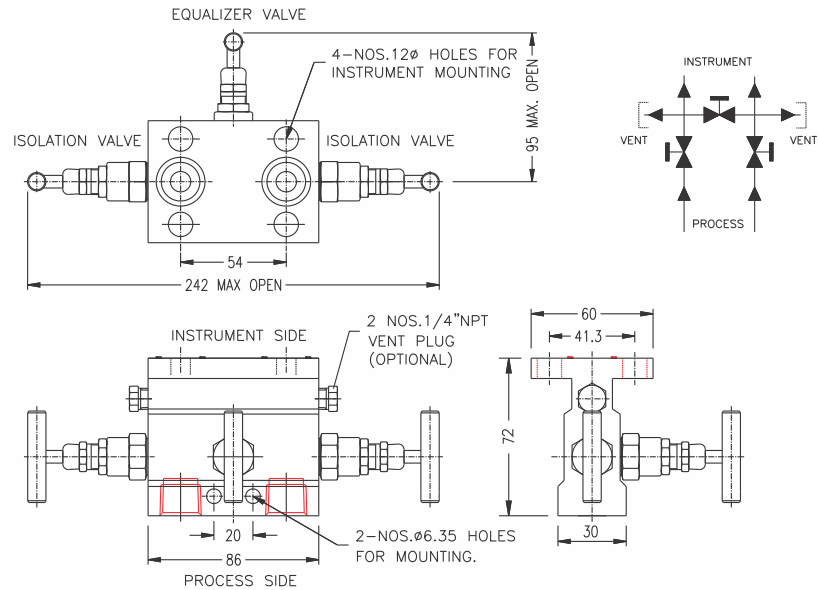

## DESCRIPTION

Designed for direct mounting on to standard differential pressure transmitters. This manifold block incorporates three valves, two main process isolation valves and one equalising valve.

Dimensions shown above are for the standard 54 mm or 2 1/8 inch instrument connection Centre distance found in majority of instruments. The manifold is also available for instruments with other centre distances for instrument connections (as 55 mm, 56 mm and 57 mm) but dimensions shown will vary. Please consult us for these dimensions.

Connections : Process : 1/2" NPT (F)  
 Instrument : Direct on instrument  
 Drain / Vent : 1/4" NPT (F)

Test Pressure : @ 25<sup>o</sup> C Room Temperature  
 Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
                   Seat - 413 Kg/cm<sup>2</sup>  
 Pneumatic : Seat - 40 Kg/cm<sup>2</sup>

Gland packing : PTFE : Standard  
                   : GRAPHOIL : Temperatures above 180<sup>o</sup>C

Material : A 105, A 182 Gr F 304SS, A 182 Gr F 316SS, Monel, Hastelloy

Finish : CS : Zinc Plated and Dichromated; SS : Natural

Accessories : Two PTFE seal ring and four 7/16" UNF HI. Steel mounting bolts available on request.

Mounting kit : Mounting bracket with U bolts and necessary kits for fitting on 2"NB stanchion pipe stand or wall mount. (to be ordered seperately)

Option : Drain Port on instrument side with drain plug.  
 Test Port on process side with plug.

Accessory : Mounting Bolts - IS : 1364 - 1960 - 4 Nos  
 Interface seal - PTFE / VITON - 2 Nos

## THREE VALVE MANIFOLD, DIRECT MOUNTING - "T" TYPE

SCREWED PROCESS AND  
FLANGED INSTRUMENTS  
CONNECTION




Model No. 3 TM 1

## THREE VALVE MANIFOLD, DIRECT MOUNTING - "H" TYPE

FLANGED INSTRUMENT  
AND PROCESS CONNECTION



Model No. 3 HM 1

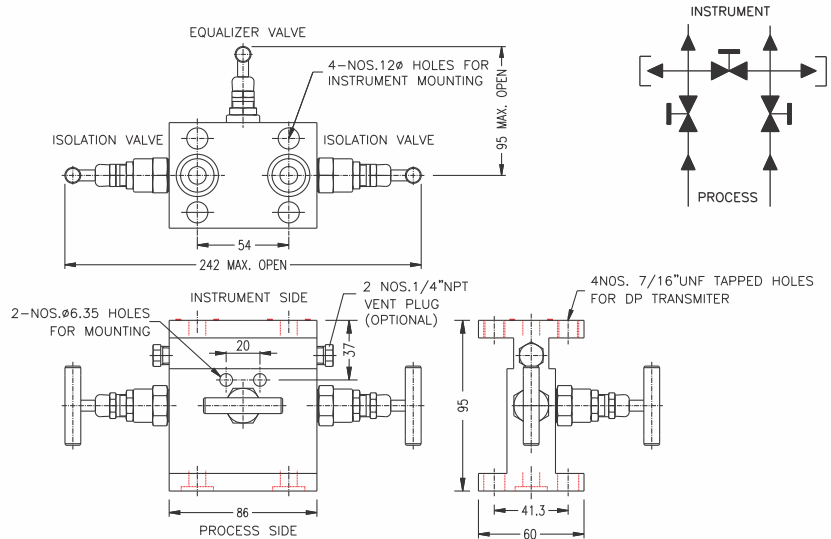

### DESCRIPTION

Designed for direct or remote mounting of differential pressure transmitters. For remote mounting two oval / kidney flanges are used for connecting process pipe to manifold block. These manifold block incorporate these valves, two main valve for process isolation and one valve for equalizing.

Dimensions shown above are for the standard 54 mm or 2 1/8 inch instrument connection Centre distance found in majority of instruments. The manifold is also available for instruments with other centre distances for instrument connections (as 55 mm, 56 mm and 57 mm) but dimensions shown will vary. Please consult us for these dimensions.

Connections : Process : Flanged  
Instrument : Flanged  
Drain / Vent : 1/4" NPT (F)

Test Pressure : @ 25° C Room Temperature  
Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
Seat - 413 Kg/cm<sup>2</sup>  
Pneumatic : Seat - 40 Kg/cm<sup>2</sup>

Gland packing : PTFE : Standard  
: GRAPHOIL : Temperatures above 180°C

Material : A 105, A 182 Gr F 304SS, A 182 Gr F 316SS, Monel, Hastelloy

Finish : CS : Zinc Plated and Dichromated; SS : Natural

Accessories : Two PTFE seal ring and four 7/16" UNF HI. Steel mounting bolts available on request.

Mounting kit : Mounting bracket with U bolts and necessary kits for fitting on 2"NB stanchion pipe stand or wall mount. (to be ordered separately)


Option : Drain Port on instrument side with drain plug.  
Test Port on process side with plug.

Accessory : Mounting Bolts - IS : 1364 - 1960 - 4 Nos  
Interface seal - PTFE / VITO 'N' - 2 Nos

## COPLANAR MOUNTING THREE VALVE MANIFOLD



Model No. 3 CPL

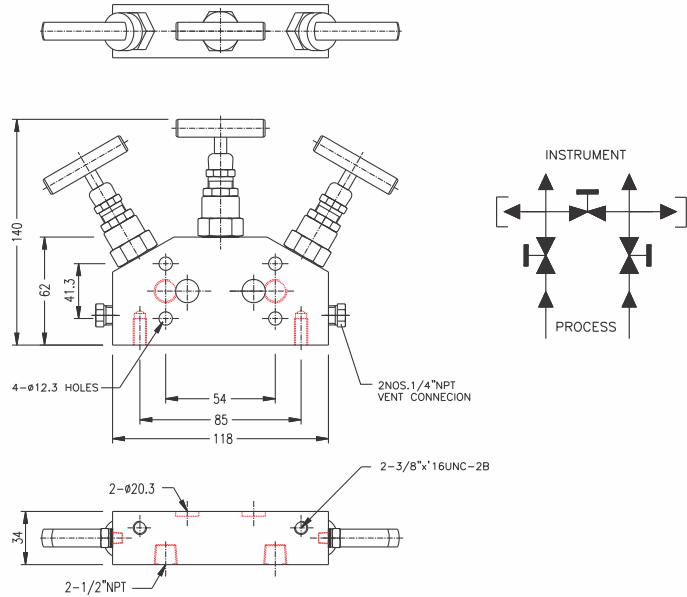

### DESCRIPTION

Designed as a new series of process instrument manifold for particular transmitter models. The coplanar manifold when assembled to transmitter has the advantage of compact size with ease for operation in minimum space, thereby eliminating several components in integrating the manifold to the transmitter. The coplanar manifold has two isolating valves, one equalizer valve and two vent ports duly plugged. The manifold dimensions illustrated are for standard 54 mm or 2 1/8 inch instrument centres but available for other centres. The direct mounting facility to the base of the differential pressure transmitter results in lesser leakage points and more accurate measurements.

Connections : Process : 1/2" NPT (F)  
 Instrument : Flanged  
 Drain / Vent : 1/4" NPT (F)

Test Pressure : @ 25° C Room Temperature  
 Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
                   Seat - 413 Kg/cm<sup>2</sup>  
 Pneumatic : Seat - 40 Kg/cm<sup>2</sup>


Gland packing : PTFE : Standard  
                   : GRAPHOIL : Temperatures above 180°C

Material : A 105, A 182 / A 479 Gr F 304SS, A 182 / A 479 Gr F316SS,  
 Monel, Hastelloy

Finish : CS : Zinc Plated and Dichromated; SS : Natural

Optional : Test Port on process side with plug.

Accessory : Mounting Bolts - IS : 1364 - 1960 - 4 Nos

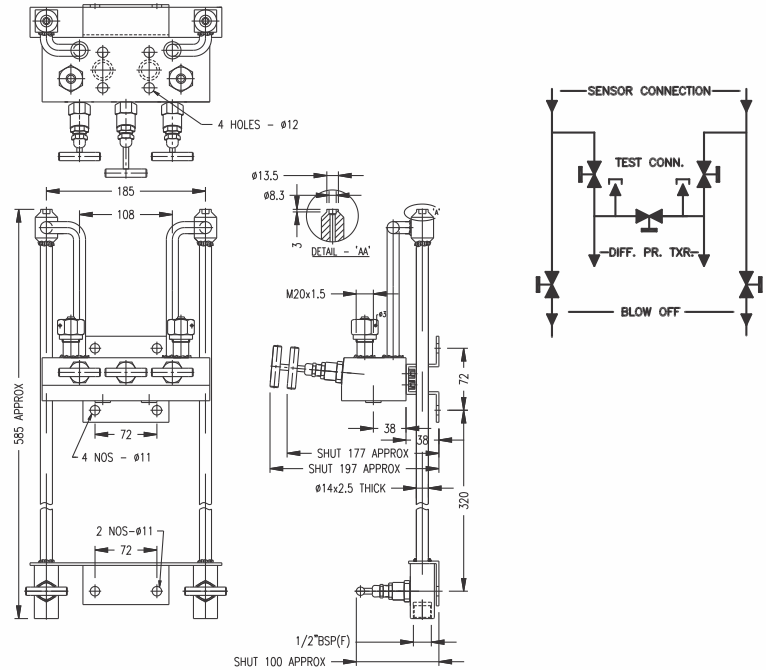

## DESCRIPTION

A fabricated manifold for use with steam and conforming to power generation regulations, usually mounted on panels in power station control room.

Connections : Process 13.5 X 2.6 BW  
Instrument : Flanged  
Drain 1/2" BSP (F)

Test Pressure : @ 25<sup>o</sup>C Room Temperature  
Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
Seat - 413 Kg/cm<sup>2</sup>  
Pneumatic : Seat - 60 Kg/cm<sup>2</sup>

Gland packing : PTFE : Standard  
GRAPHOIL : Temperatures above 180<sup>o</sup>C

Material : A 105, A 182 / A 479 Gr F 304SS, A 182 / A 479 Gr F316SS

Finish : CS - zinc plated and dichromated. SS - natural finish





Accessory : Mounting Bolts - IS : 1364 - 1960 - 4 Nos  
Interface seal - PTFE / VITON - 2 Nos

## VALVE COMBINATION



Model No. VCM





## DESCRIPTION

A manifold very popular with power generating equipment, especially, with superheated steam conforming to boiler regulations.

Connections : Process 13.5 X 2.6 BW  
Instrument : Flanged  
Drain M20 x 1.5 (M)

Test Pressure : @ 25<sup>o</sup>C Room Temperature  
Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
                  Seat - 413 Kg/cm<sup>2</sup>  
Pneumatic : Seat - 60 Kg/cm<sup>2</sup>

Gland packing : PTFE : Standard  
                  GRAPHOIL : Temperatures above 180<sup>o</sup>C

Material : A 105, A 182 / A 479 Gr F 304SS, A 182 / A 479 Gr F316SS


Finish : CS : Zinc Plated and Dichromated; SS : Natural

Accessory : Mounting Bolts - IS : 1364 - 1960 - 4 Nos  
                  Interface seal - PTFE / VITON - 2 Nos

## 3 VALVE MANIFOLD



Model No.3 DM 5

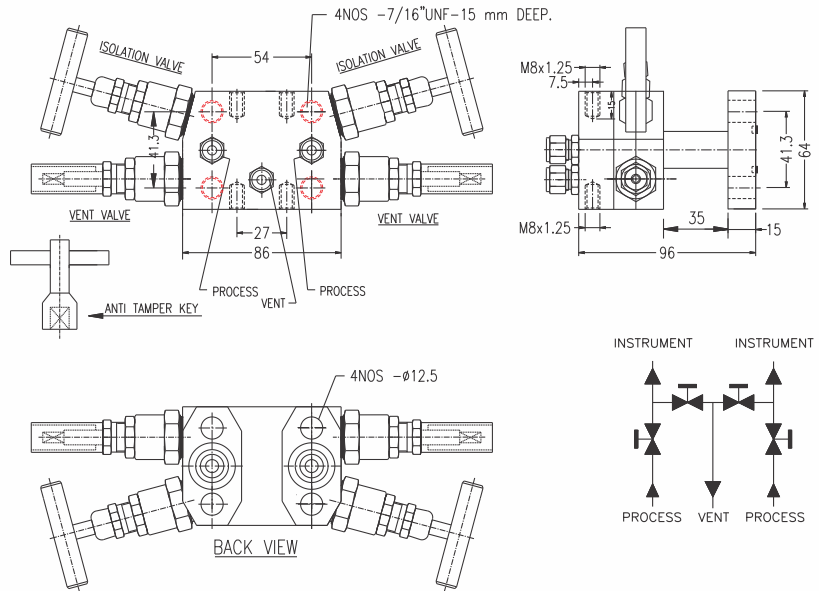

## DESCRIPTION

Designed for where process HYD-AIR must not be contaminated, using differential pressure instruments.

Dimensions shown above are for the standard 54 mm or 2 1/8 inch instrument connection Centre distance found in majority of instruments. The manifold is also available for instruments with other centre distances for instrument connections (as 55 mm, 56 mm and 57 mm) but dimensions shown will vary. Please consult us for these dimensions.

The essential feature of this design is a vent/drain valve which is provided with a tamper-proof handle to be removed after operation. This arrangement is especially suitable for applications with hazardous HYD-AIR.

Isolation valve with "T" bar handle vent valve with anti tamper handle

Connections : Process : 1/4" NPT (F) / 1/4" BSPT (F) / 10 mm OD  
 Instrument : Flanged  
 Drain / Vent : 1/4" NPT (F) / 1/4" BSPT (F) / 10 mm OD

Test Pressure : @ 25°C Room Temperature  
 Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
 Seat - 413 Kg/cm<sup>2</sup>  
 Pneumatic : Seat - 40 Kg/cm<sup>2</sup>


Gland packing : PTFE : Standard  
 : GRAPHOIL : Temperatures above 180°C

Material : A 105, A 182 Gr F 304SS, A 182 Gr F 316SS, Monel, Hastelloy


Finish : CS : Zinc Plated and Dichromated; SS : Natural

Accessory : Mounting Bolts - IS : 1364 - 1960 - 4 Nos  
 Interface seal - PTFE / VITON - 2 Nos

# FOUR VALVE MANIFOLD - DOUBLE ISOLATE / VENT BLOCK - DIRECT MOUNTING TYPE

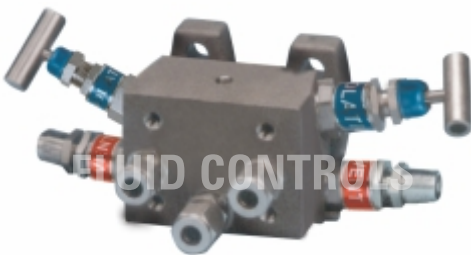

Model No. 4 DM 1

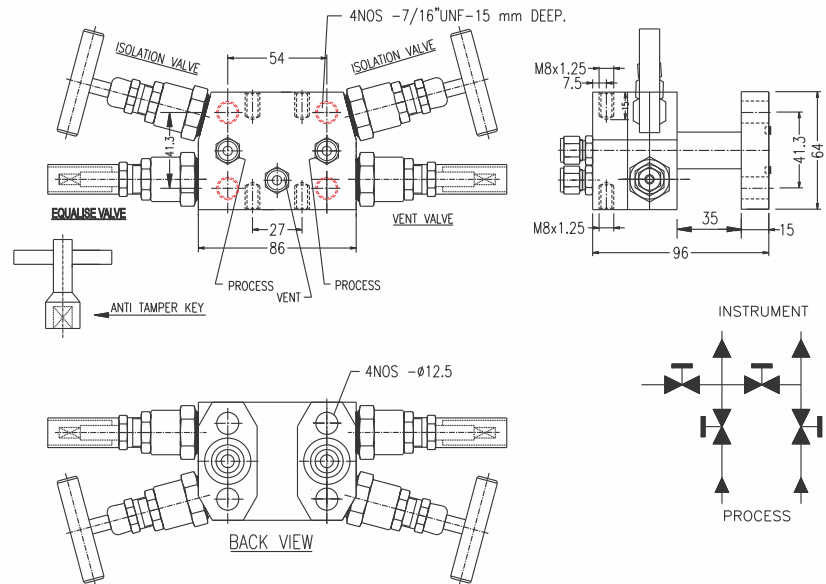

## FOUR VALVE MANIFOLD - DOUBLE ISOLATE / EQUALIZE / VENT BLOCK - DIRECT MOUNTING TYPE



### DESCRIPTION

Designed for general liquid and gas measurement applications for differential pressure instruments with a common drain

The essential feature of this design is a vent/drain valve which is provided with a tamper-proof handle to be removed after operation. This arrangement is especially suitable for applications with hazardous HYD-AIR.

Isolation valve with 'T' bar handle vent valve with anti tamper handle

Connections : Process : 1/4" NPT (F) / 1/4" BSPT (F) / 10 mm OD  
 Instrument : Flanged  
 Drain / Vent : 1/4" NPT (F) / 1/4" BSPT (F) / 10 mm OD

Test Pressure : @ 25° C Room Temperature  
 Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
 Seat - 413 Kg/cm<sup>2</sup>  
 Pneumatic : Seat - 40 Kg/cm<sup>2</sup>

Gland packing : PTFE : Standard  
 : GRAPHOIL : Temperatures above 180°C

Material : A 105, A 182 Gr F 304SS, A 182 Gr F 316SS, Monel, Hastelloy

Finish : CS : Zinc Plated and Dichromated; SS : Natural

Accessory : Mounting Bolts - IS : 1364 - 1960 - 4 Nos  
 Interface seal - PTFE / VITON - 2 Nos


**ORDERING CODE FOR 5 VALVE MANIFOLD**

DESCRIPTION	FEATURE	SYMBOL	8	-	5	FMNV	5DM3	N	SFT-GASB.	S	
Threaded process-Instrument connections	1/2"	8									
Valves contained	No of cartridges	5									
Series	With all threaded connection	5 MNV									
	With flanged instrument & threaded process connection	5 FMNV									
	With flanged process connection	5 FFMNV									
	Coplanar	5 CPL									
Type	All threaded connections	<b>Remote mounting type</b>									
		Screwed process and instrument connection drain in side	5 RM 1								
		Screwed process and instrument connection drain in front	5 RM 2								
	For flanged instrument and threaded process connections	Screwed process and instrument connection drain in bottom	5 RM 3								
		Vent valves on side and rest on top, screwed process connection	5 DM 1								
		Screwed process and flanged instrument connection	5 TM 2								
		Coplanar - drain connections adjacent to drain valve	5 CPL 1								
	For flange to flange	Coplanar - drain connections at process side	5 CPL 2								
		<b>Flange mounting type</b>									
		Flanged instrument and process connection, drain on one side optional test port at bottom	5DM3								
Thread specification	NPT to ASA B 2.1 - 1960	N									
	ISO parallel to ISO : 228/1	R									
	ISO taper to ISO : 7/1	RX									
Note : not applicable for manifolds with flange to flange end connections.											
Seat	Metallic seat	No symbol									
	Soft seat for isolation valves only										
	Soft seat material - PTFE	SFT									
	Soft seat material - DELRIN	SFD									
	Soft seat material - PEEK	SFP									
Stem packing material	Teflon (standard)	No symbol									
	Graphitised asbestos	GASB									
	Graphoil	GOIL									
	Teflon asbestos	TASI									
Body material	A 105	No symbol									
	SS 304/SS304L **	S/SL									
	SS 316 /SS316L**	SS/SSL									
	Monel	MNL									
	Hastelloy C	HAC									

\*\* For material conformity to NACE MR-01-75 USE SUFFIX "NACE" AS S/NACE, SS/NACE,SSL/NACE

Note : Due to continous improvement & customer interaction designs & specifications may be modified or upgraded without notice.



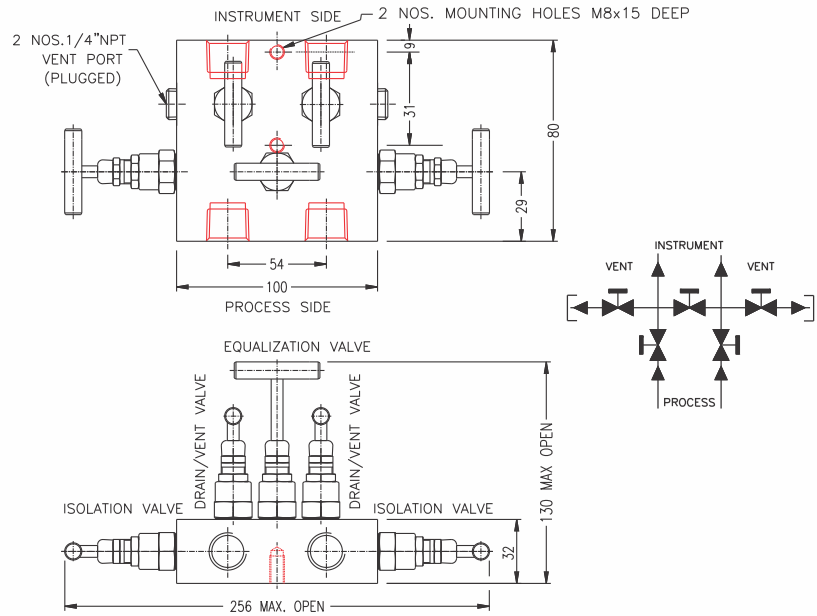

## DESCRIPTION

Five Valve Manifold 5 RM1 incorporate two process isolation valves, one equalizer valve and two drain/vent valves with separate connections in a compact manifold block. The Model 5 RM1 is designed for remote mounting away from the differential pressure instrument and joined by tube or pipe impulse lines. They have threaded connections of which the most popular are detailed below but also available to suit other sizes and standards.

Dimensions shown above are for the standard 54 mm or 2 1/8 inch instrument connection. Centre distance found in majority of instruments. The manifold is also available for instruments with other centre distances for instrument connections (as 55 mm, 56 mm and 57 mm) but dimensions shown will vary. Please consult us for these dimensions.

## FIVE VALVE MANIFOLD, REMOTE MOUNTED TYPE

### SCREWED CONNECTIONS

Connections : Process : 1/2" NPT (F)  
Instrument : 1/2" NPT (F)  
Drain / Vent : 1/4" NPT (F)

Test Pressure : @ 25° C Room Temperature  
Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
Seat - 413 Kg/cm<sup>2</sup>  
Pneumatic : Seat - 40 Kg/cm<sup>2</sup>

Gland packing : PTFE : Standard  
: GRAPHOIL : Temperatures above 180°C

Material : A 105, A 182 / A 479 Gr F 304SS, A 182 / A 479 Gr F316SS,  
Monel, Hastelloy


Finish : CS : Zinc Plated and Dichromated; SS : Natural

Option : Test Port on process side with plug.

Accessory : Mounting Bolts - IS : 1364 - 1960 - 2 Nos



Model No. 5 RM 1

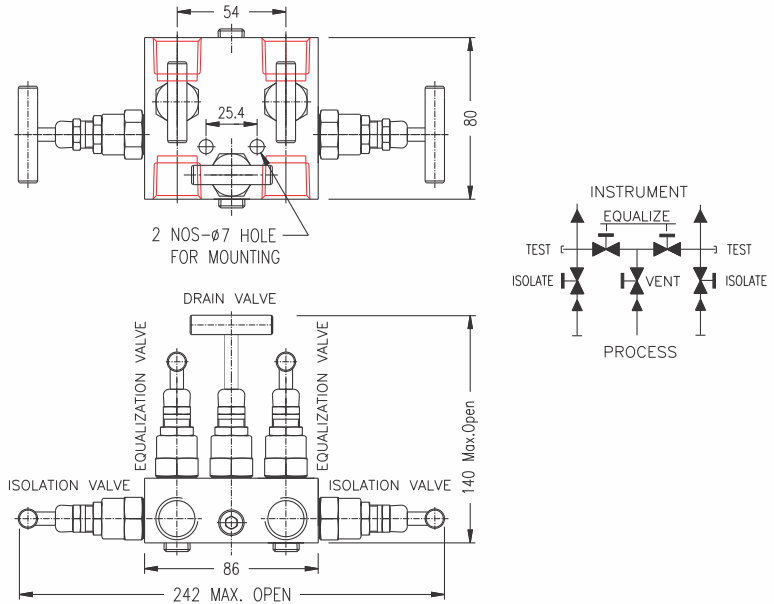

## DESCRIPTION

Five Valve Manifold 5 RM2 incorporate two process isolation valves, one equalizer valve and two drain/vent valves with a common drain connection in a compact manifold block. The Model 5 RM2 is designed for remote mounting away from the differential pressure instrument and joined by tube or pipe impulse lines. They have threaded connections of which the most popular are detailed below but also available to suit other sizes and standards.

Dimensions shown above are for the standard 54 mm or 2 1/8 inch instrument connection Centre distance found in majority of instruments. The manifold is also available for instruments with other centre distances for instrument connections (as 55 mm, 56 mm and 57 mm) but dimensions shown will vary. Please consult us for these dimensions.

Connections : Process : 1/2" NPT (F)  
 Instrument : 1/2" NPT (F)  
 Drain / Vent : 1/4" NPT (F)

Test Pressure : @ 25° C Room Temperature  
 Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
 Seat - 413 Kg/cm<sup>2</sup>  
 Pneumatic : Seat - 40 Kg/cm<sup>2</sup>

Gland packing : PTFE : Standard  
 GRAPHOIL : Temperatures above 180°C

Material : A 105, A 182 / A 479 Gr F 304SS, A 182 / A 479 Gr F316SS,  
 Monel, Hastelloy

Finish : CS : Zinc Plated and Dichromated; SS : Natural

Option : Test Port on precess side with plug.


Accessory : Mounting Bolts - IS : 1364 - 1960 - 2 Nos

## FIVE VALVE MANIFOLD, REMOTE MOUNTED TYPE

SCREWED PROCESS AND  
 INSTRUMENT CONNECTION -  
 DRAIN IN FRONT



Model No. 5 RM 2

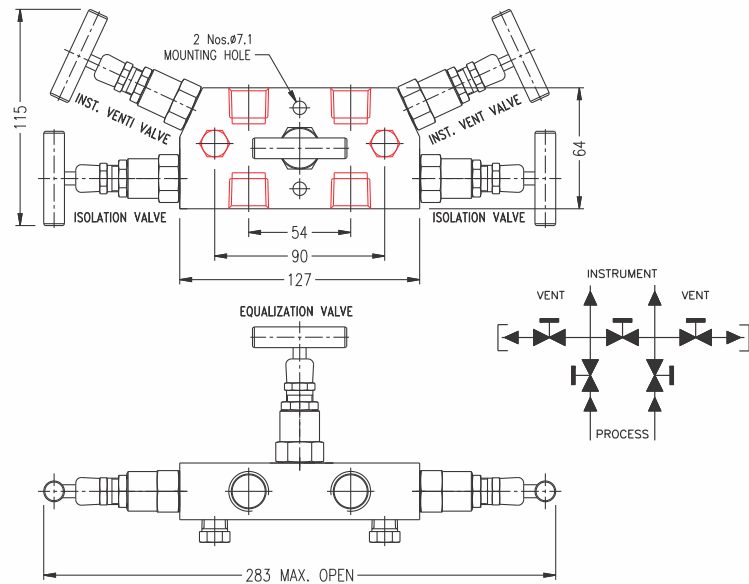

## DESCRIPTION

Five Valve Manifold 5 RM3 incorporate two process isolation valves, one equalizer valve and two drain/vent valves with separate connections in a compact manifold block. The Model 5 RM3 is designed for remote mounting away from the differential pressure instrument and joined by tube or pipe impulse lines. They have threaded connections of which the most popular are detailed below but also available to suit other sizes and standards.

Dimensions shown above are for the standard 54 mm or 2 1/8 inch instrument connection Centre distance found in majority of instruments. The manifold is also available for instruments with other centre distances for instrument connections (as 55 mm, 56 mm and 57 mm) but dimensions shown will vary. Please consult us for these dimensions.

Connections : Process : 1/2" NPT (F)  
 Instrument : 1/2" NPT (F)  
 Drain / Vent : 1/4" NPT (F)

Test Pressure : @ 25°C Room Temperature  
 Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
 Seat - 413 Kg/cm<sup>2</sup>  
 Pneumatic : Seat - 40 Kg/cm<sup>2</sup>

Gland packing : PTFE : Standard  
 : GRAPHOIL : Temperatures above 180°C

Material : A 105, A 182 / A 479 Gr F 304SS, A 182 / A 479 Gr F316SS,  
 Monel, Hastelloy

Finish : CS : Zinc Plated and Dichromated; SS : Natural

Option : Test Port on precess side with plug.

Accessory : Mounting Bolts - IS : 1364 - 1960 - 2 Nos

## FIVE VALVE MANIFOLD, REMOTE MOUNTED TYPE

### SCREWED CONNECTIONS




Model No. 5 RM 3

## FIVE VALVE MANIFOLD, DIRECT MOUNTING - TYPE DM 1

VENT VALVES ON SIDE  
& REST ON TOP, SCREWED  
PROCESS CONNECTION



Model No. 5 DM 1

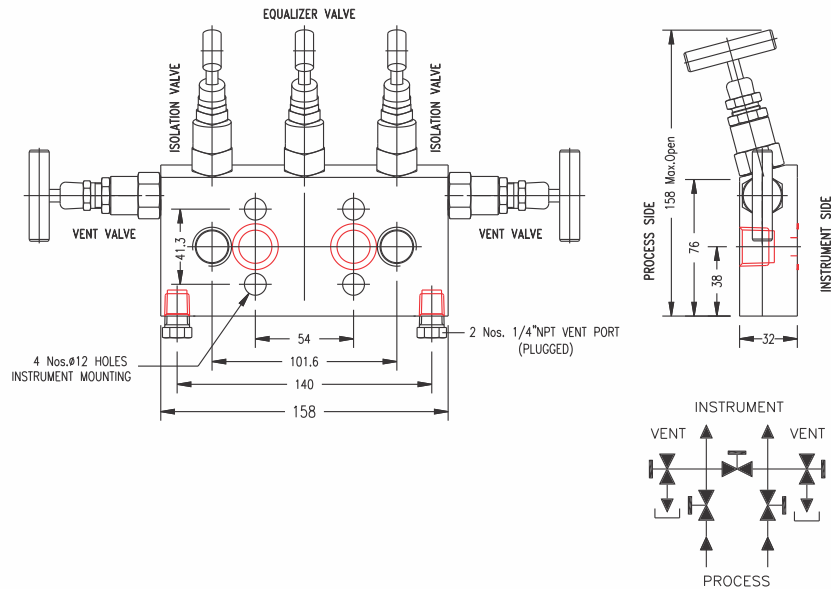

### DESCRIPTION

Five Valve Manifold Model 5DM1 is designed for direct mounting on differential pressure instruments. The manifold incorporates two process isolation valves, one equalizer valve and two drain/vent valves with separate connections. The process connection is through threaded connections for tube or pipe assembly. The valves are suitably angled to prevent fouling with the instrument. Dimensions shown are for the standard 54 mm or 2 1/8 inch instrument connection centres but also available for other centres on request.

Connections : Process : 1/2" NPT (F)  
Instrument : Flanged  
Drain / Vent : 1/4" NPT (F)

Test Pressure : @ 25° C Room Temperature  
Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
Seat - 413 Kg/cm<sup>2</sup>  
Pneumatic : Seat - 40 Kg/cm<sup>2</sup>

Gland packing : PTFE : Standard  
: GRAPHOIL : Temperatures above 180°C


Material : A 105, A 182 / A 479 Gr F 304SS, A 182 / A 479 Gr F316SS,  
Monel, Hastelloy

Finish : CS : Zinc Plated and Dichromated; SS : Natural

Option : Test Port on precess side with plug.

Accessory : Mounting Bolts - IS : 1364 - 1960 - 4 Nos  
Interface seal - PTFE / VITON - 2 Nos



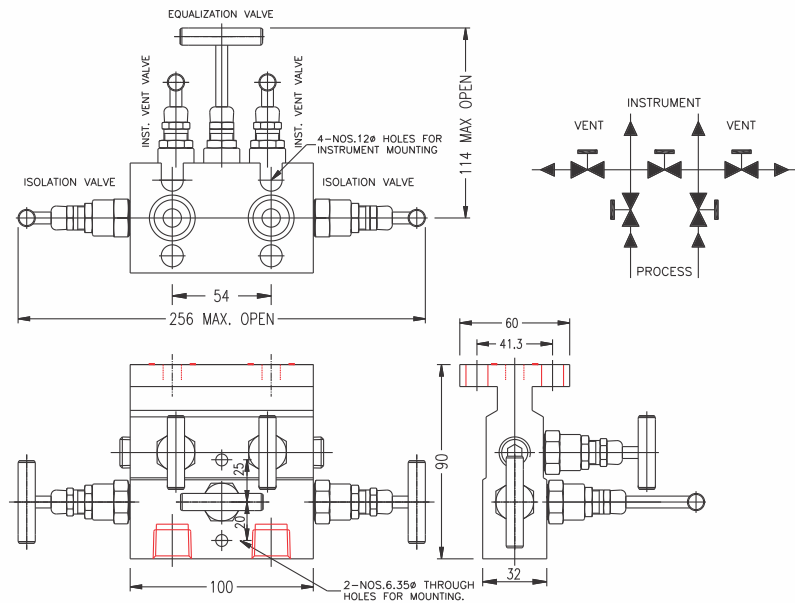

## DESCRIPTION

Five Valve Manifold Model "T" type Model 5TM1 is designed for direct mounting on differential pressure instruments. The manifold incorporates two process isolation valves, one equalizer valve and two drain/vent valves in a compact block. The process connection is threaded for connections by tube or pipe fittings. Dimensions shown are for the standard 54 mm or 2 1/8 inch centres for instrument and process connections but are available for other centres on request. Thread details shown are for standard popular sizes and available to suit other thread standards.

## FIVE - VALVE MANIFOLD, DIRECT MOUNTING - " T " TYPE

SCREWED PROCESS AND  
FLANGED INSTRUMENTS  
CONNECTION

Connections : Process : 1/2" NPT (F)  
Instrument : Flanged  
Drain / Vent : 1/4" NPT (F)

Test Pressure : @ 25° C Room Temperature  
Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
Seat - 413 Kg/cm<sup>2</sup>  
Pneumatic : Seat - 40 Kg/cm<sup>2</sup>

Gland packing : PTFE : Standard  
: GRAPHOIL : Temperatures above 180°C

Material : A 105, A 182 Gr F 304SS, A 182 Gr F 316SS, Monel, Hastelloy

Finish : CS : Zinc Plated and Dichromated; SS : Natural

Mounting kit : Mounting bracket with U bolts and necessary kits for fitting on 2"NB stanchion pipe stand or wall mount. (to be ordered separately)

Option : Test Port on precess side with plug.

Accessory : Mounting Bolts - IS : 1364 - 1960 - 4 Nos  
Interface seal - PTFE / VITON - 2 Nos




Model No. 5 TM 1

## FIVE - VALVE MANIFOLD, DIRECT MOUNTING - " H " TYPE

FLANGED INSTRUMENT AND  
PROCESS CONNECTION-DRAIN PORT  
ON ONE SIDE OPTIONAL TEST PORT  
AT BOTTOM



Model No. 5 HM 1

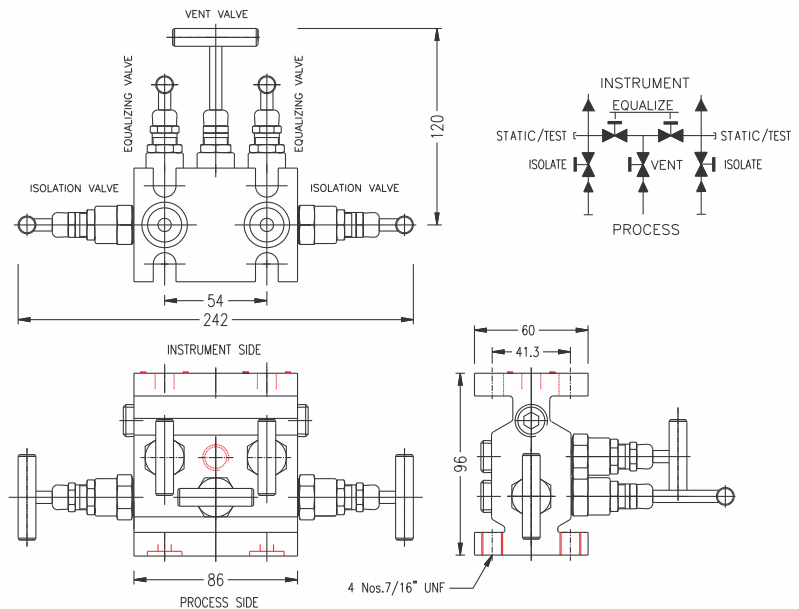

### DESCRIPTION

Designed for direct or remote mounting of differential pressure transmitters. For remote mounting two oval/kidney flanges are used for connecting process pipe to manifold block. These manifold block incorporate five valves, two main valve for process isolation valve for vent two valves for equalizing.

Dimensions shown above are for the standard 54 mm or 2 1/8 inch instrument connection Centre distance found in majority of instruments. The manifold is also available for instruments with other centre distances for instrument connections (as 55 mm, 56 mm and 57 mm) but dimensions shown will vary. Please consult us for these dimensions.

Connections : Process : Flanged  
Instrument : Flanged  
Drain / Vent : 1/4" NPT (F)

Test Pressure : @ 25° C Room Temperature  
Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
Seat - 413 Kg/cm<sup>2</sup>  
Pneumatic : Seat - 40 Kg/cm<sup>2</sup>

Gland packing : PTFE : Standard  
: GRAPHOIL : Tempretures above 180°C


Material : A 105, A 182 Gr F 304SS, A 182 Gr F 316SS, Monel, Hastelloy

Finish : CS : Zinc Plated and Dichromated; SS : Natural

Mounting kit : Mounting bracket with U bolts and necessary kits for fitting on 2"NB stanchion pipe stand or wall mount. (to be ordered seperately)

Option : Test Port on precess side with plug.

Accessory : Mounting Bolts - IS : 1364 - 1960 - 4 Nos  
Interface seal - PTFE / VITON - 2 Nos

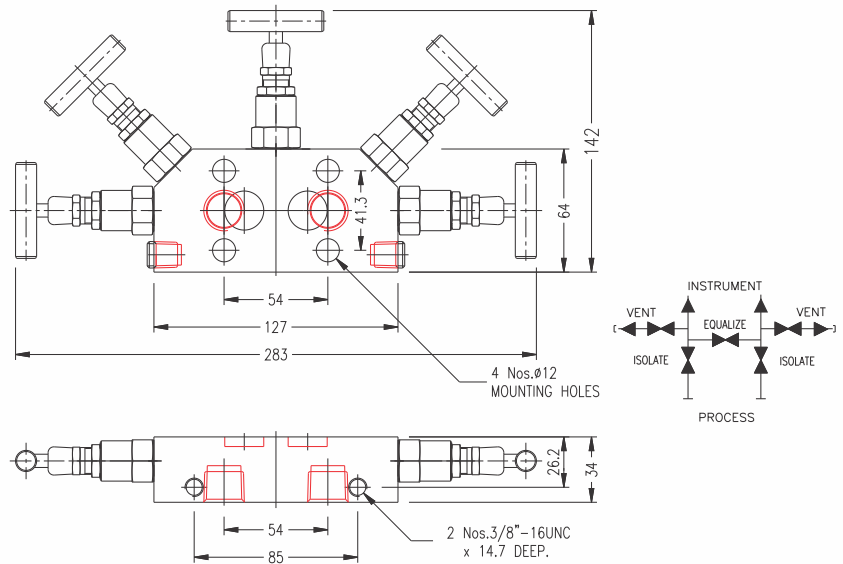

## DESCRIPTION

Designed as a new series of process instrument manifold for particular transmitter models. The coplanar manifold when assembled to transmitter has the advantage of compact size with ease for operation in minimum space, thereby eliminating several components in integrating the manifold to the transmitter. The coplanar manifold has two isolating valves, one equalizer valve and two vent valves and two bottom test ports duly plugged. The manifold dimensions illustrated are for standard 54 mm or 2 1/8 inch instrument centres but available for other centres. The direct mounting facility to the base of the differential pressure transmitter results in lesser leakage points and more accurate measurements.

Connections : Process : 1/2" NPT (F)  
 : Instrument : Flanged  
 : Drain / Vent : 1/4" NPT (F)

Test Pressure : @ 25°C Room Temperature  
 Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
 : Seat - 413 Kg/cm<sup>2</sup>  
 Pneumatic : Seat - 40 Kg/cm<sup>2</sup>

Gland packing : PTFE : Standard  
 : GRAPHOIL : Temperatures above 180°C

Material : A 105, A 182 / A 479 Gr F 304SS, A 182 / A 479 Gr F316SS,  
 Monel, Hastelloy


Finish : CS : Zinc Plated and Dichromated; SS : Natural

Optional : Test Port on precess side with plug.

Accessory : Mounting Bolts - IS : 1364 - 1960 - 4 Nos

## COPLANAR MOUNTING FIVE VALVE MANIFOLD



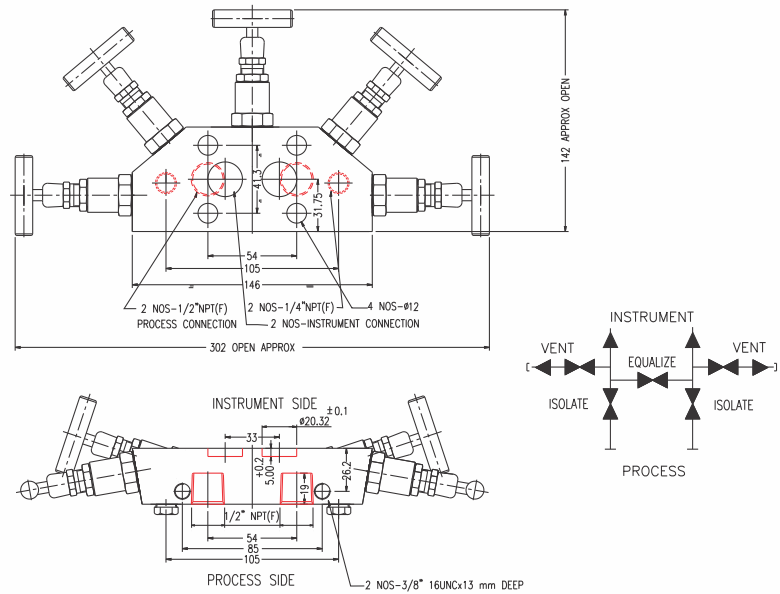

## DESCRIPTION

Designed as a new series of process instrument manifold for particular transmitter models. The coplanar manifold when assembled to transmitter has the advantage of compact size with ease for operation in minimum space, thereby eliminating several components in integrating the manifold to the transmitter. The coplanar manifold has two isolating valves, one equalizer valve and two vent valves and two bottom test ports duly plugged. The manifold dimensions illustrated are for standard 54 mm or 2 1/8 inch instrument centres but available for other centres. The direct mounting facility to the base of the differential pressure transmitter results in lesser leakage points and more accurate measurements.

Connections : Process : 1/2" NPT (F)  
 Instrument : Flanged  
 Drain / Vent : 1/4" NPT (F)

Test Pressure : @ 25° C Room Temperature  
 Hydrostatic : Body - 620 Kg/cm<sup>2</sup>  
 Seat - 413 Kg/cm<sup>2</sup>  
 Pneumatic : Seat - 40 Kg/cm<sup>2</sup>

Gland packing : PTFE : Standard  
 : GRAPHOIL : Temperatures above 180°C

Material : A 105, A 182 / A 479 Gr F 304SS, A 182 / A 479 Gr F316SS,  
 Monel, Hastelloy

Finish : CS : Zinc Plated and Dichromated; SS : Natural

Optional : Test Port on process side with plug.

Accessory : Mounting Bolts - IS : 1364 - 1960 - 4 Nos

## COPLANAR MOUNTING FIVE VALVE MANIFOLD



Model No. 5 CPL 2



## **FLUID CONTROLS PRIVATE LIMITED**

**Corporate Address:** 5<sup>th</sup> Floor, The International, 16 Maharshi Karve Road, New Marine Lines, Mumbai 400020, INDIA

**Tel.:** +91-22-6823 8000 | **Fax:** +91-22-6823 8001

**E-commerce:** [sales@fluidcontrols.com](mailto:sales@fluidcontrols.com) | **Website:** [www.fluidcontrols.com](http://www.fluidcontrols.com)